

Multicast and Anycast

Kyle Jamieson

Lecture 13

COS 461: Computer Networks

Outline today


- **IP Anycast**

- N destinations, 1 address, 1 should receive the message
- Why: Provide a service from multiple network locations
- Using routing protocols for automated failover


- **Multicast Protocols**

- N destinations, 1 address, N should receive the message
- Examples
 - IP Multicast
 - SRM (Scalable Reliable Multicast)
 - PGM (Pragmatic General Multicast)

unicast

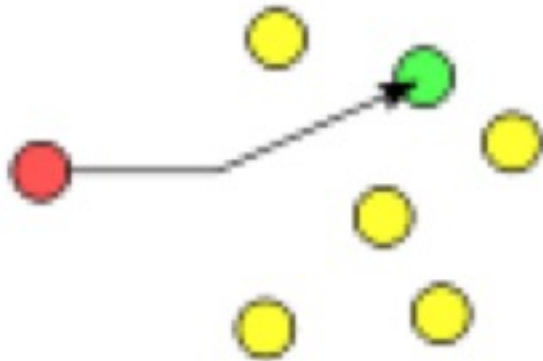


anycast

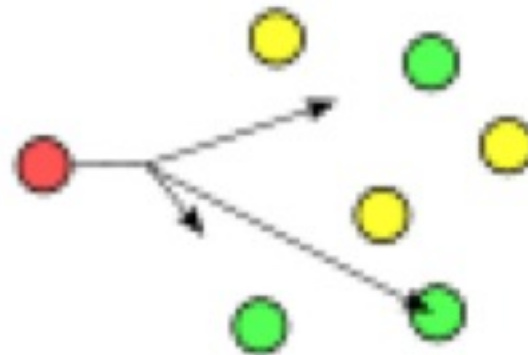

broadcast



multicast

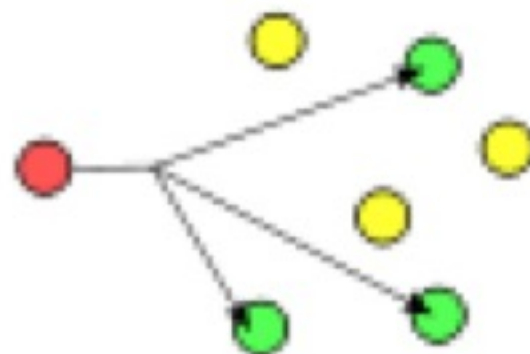

Limitations of DNS-based failover

- Failover/load balancing via multiple A records

```
;; ANSWER SECTION:
```


```
www.cnn.com.      300    IN A    157.166.255.19  
www.cnn.com.      300    IN A    157.166.224.25  
www.cnn.com.      300    IN A    157.166.226.26  
www.cnn.com.      300    IN A    157.166.255.18
```

- If server fails, service unavailable for TTL
 - Very low TTL: Extra load on DNS
 - Anyway, browsers cache DNS mappings ☹️
- What if root NS fails? All DNS queries take > 3s?


Motivation for IP anycast

- Failure problem: client has resolved IP address
 - What if IP address can represent many servers?
- Load-balancing/failover via IP addr, rather than DNS
- IP anycast is simple reuse of existing protocols
 - Multiple instances of a service share same IP address
 - Each instance announces IP address / prefix in BGP / IGP
 - Routing infrastructure directs packets to nearest instance of the service
 - Can use same selection criteria as installing routes in the FIB
 - No special capabilities in servers, clients, or network

IP anycast in action

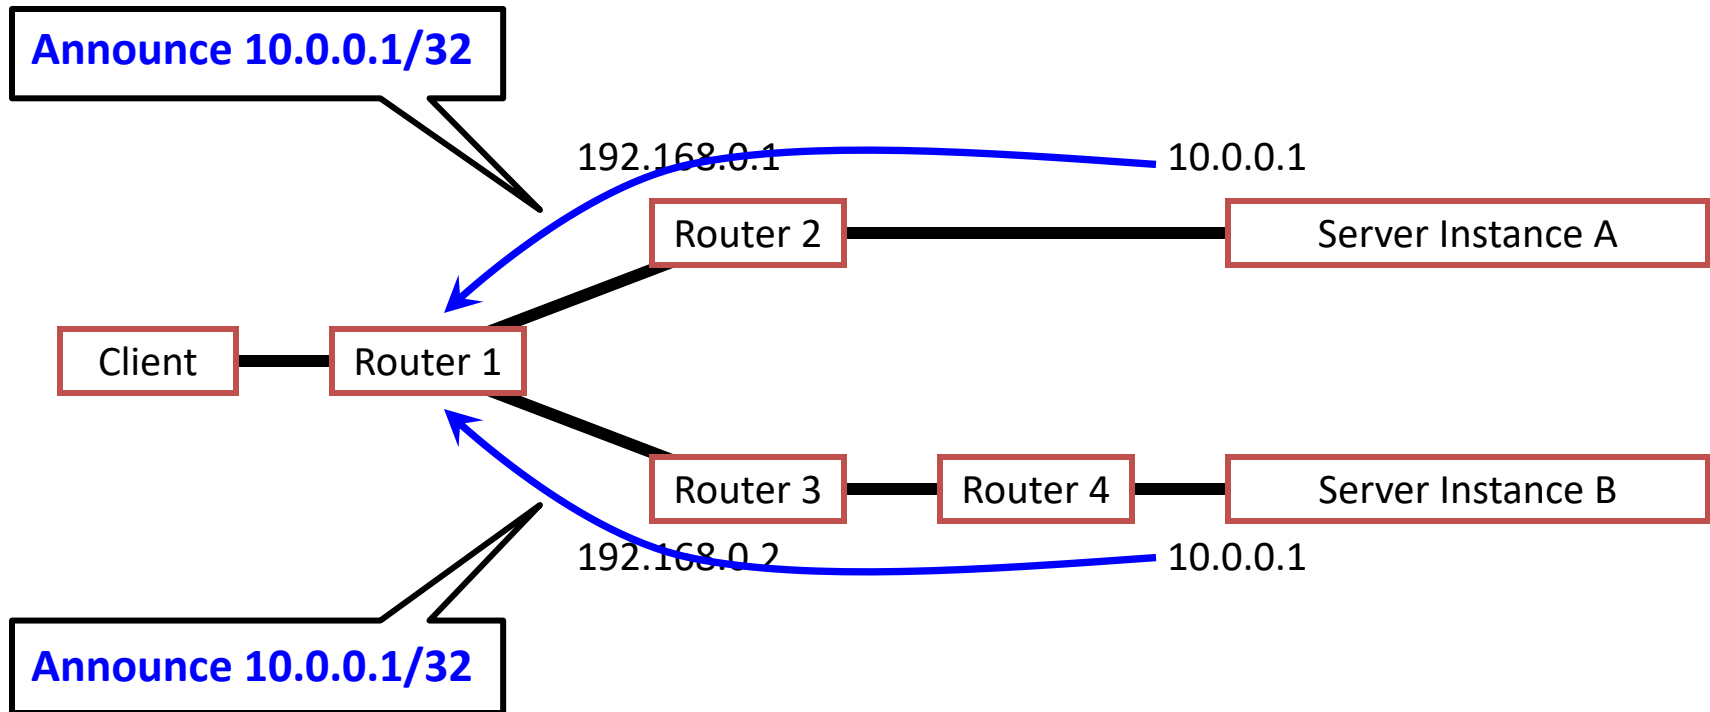


IP anycast in action

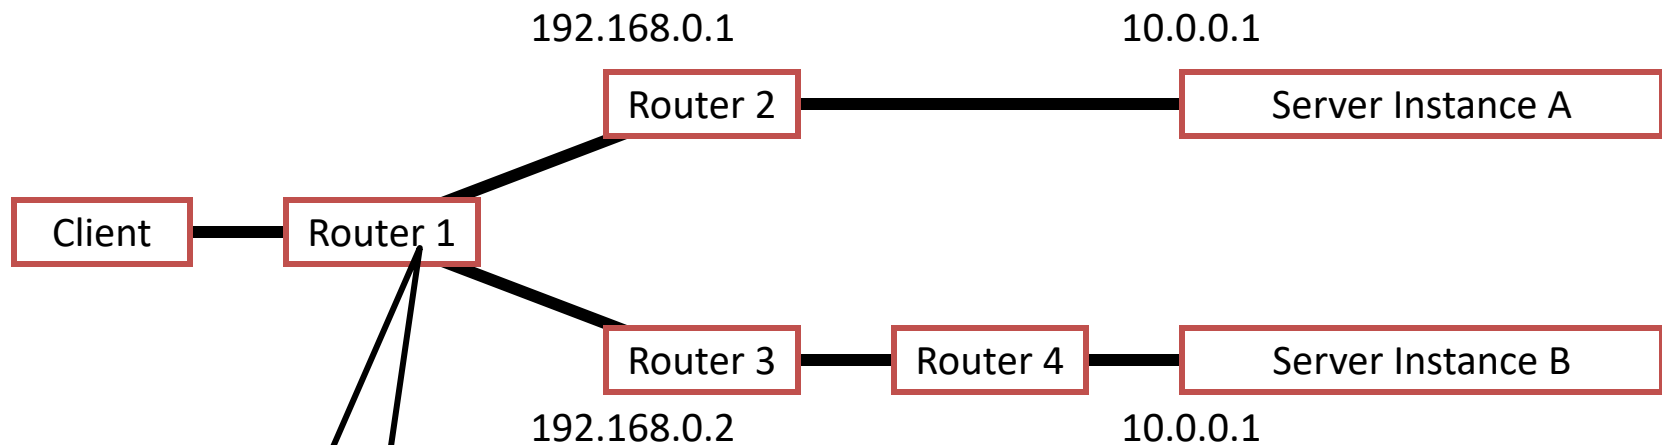

Routing Table from Router 1:

Destination	Mask	Next-Hop	Distance
192.168.0.0	/29	127.0.0.1	0
10.0.0.1	/32	192.168.0.1	1
10.0.0.1	/32	192.168.0.2	2


IP anycast in action

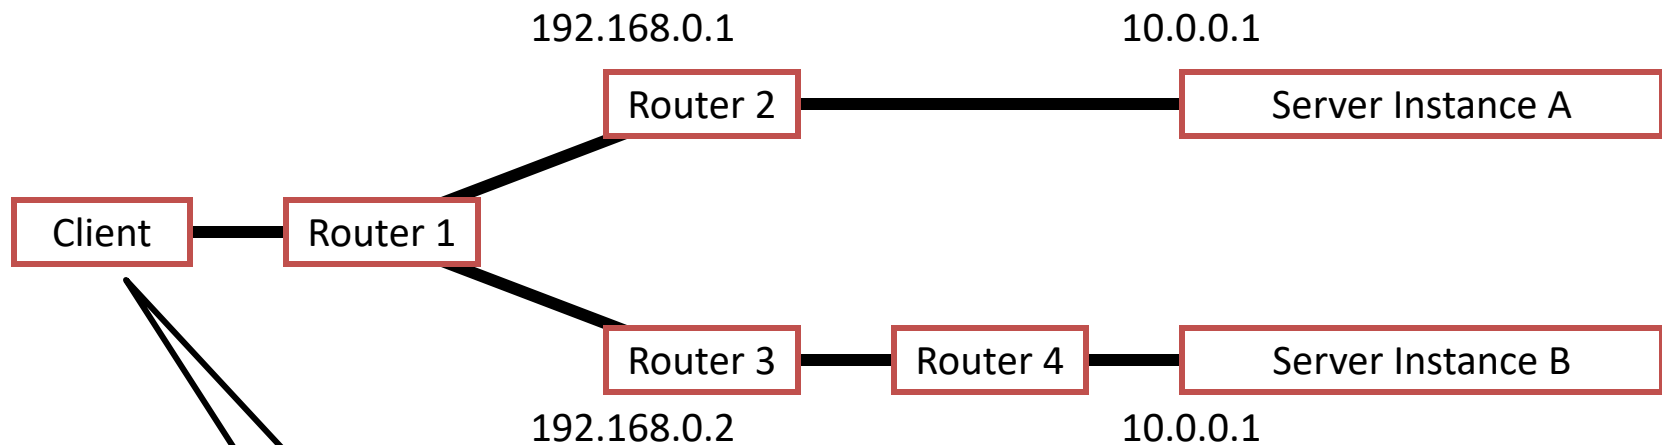

DNS lookup for `http://www.server.com/`
produces a single answer:

```
www.server.com. IN A 10.0.0.1
```



IP anycast in action

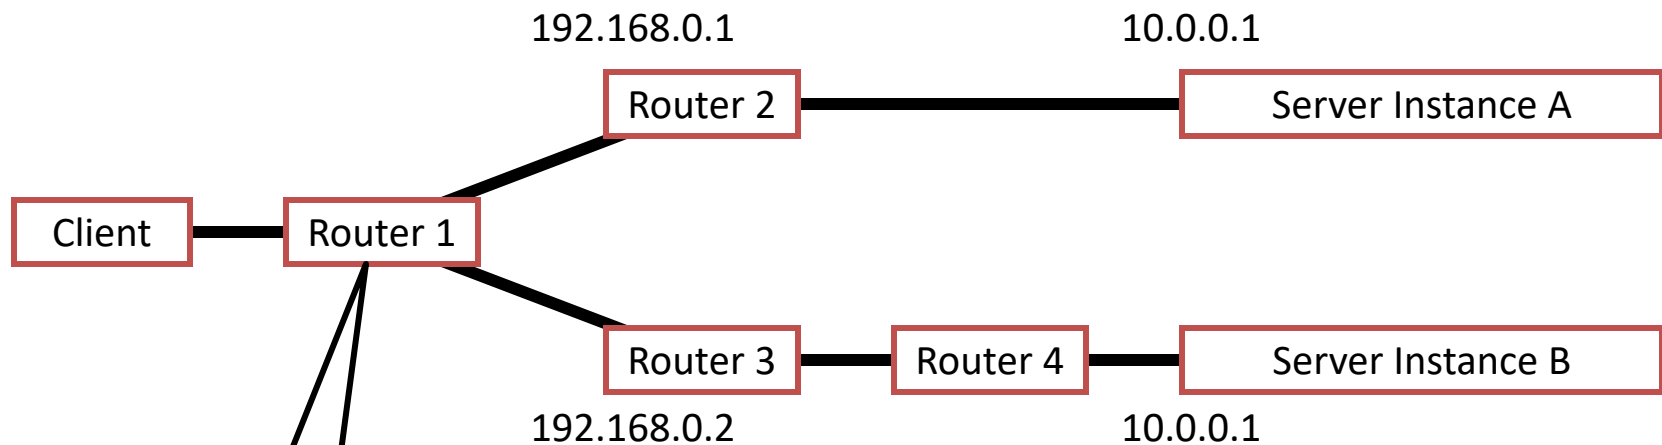


Routing Table from Router 1:

Destination	Mask	Next-Hop	Distance
192.168.0.0	/29	127.0.0.1	0
10.0.0.1	/32	192.168.0.1	1
10.0.0.1	/32	192.168.0.2	2

IP anycast in action

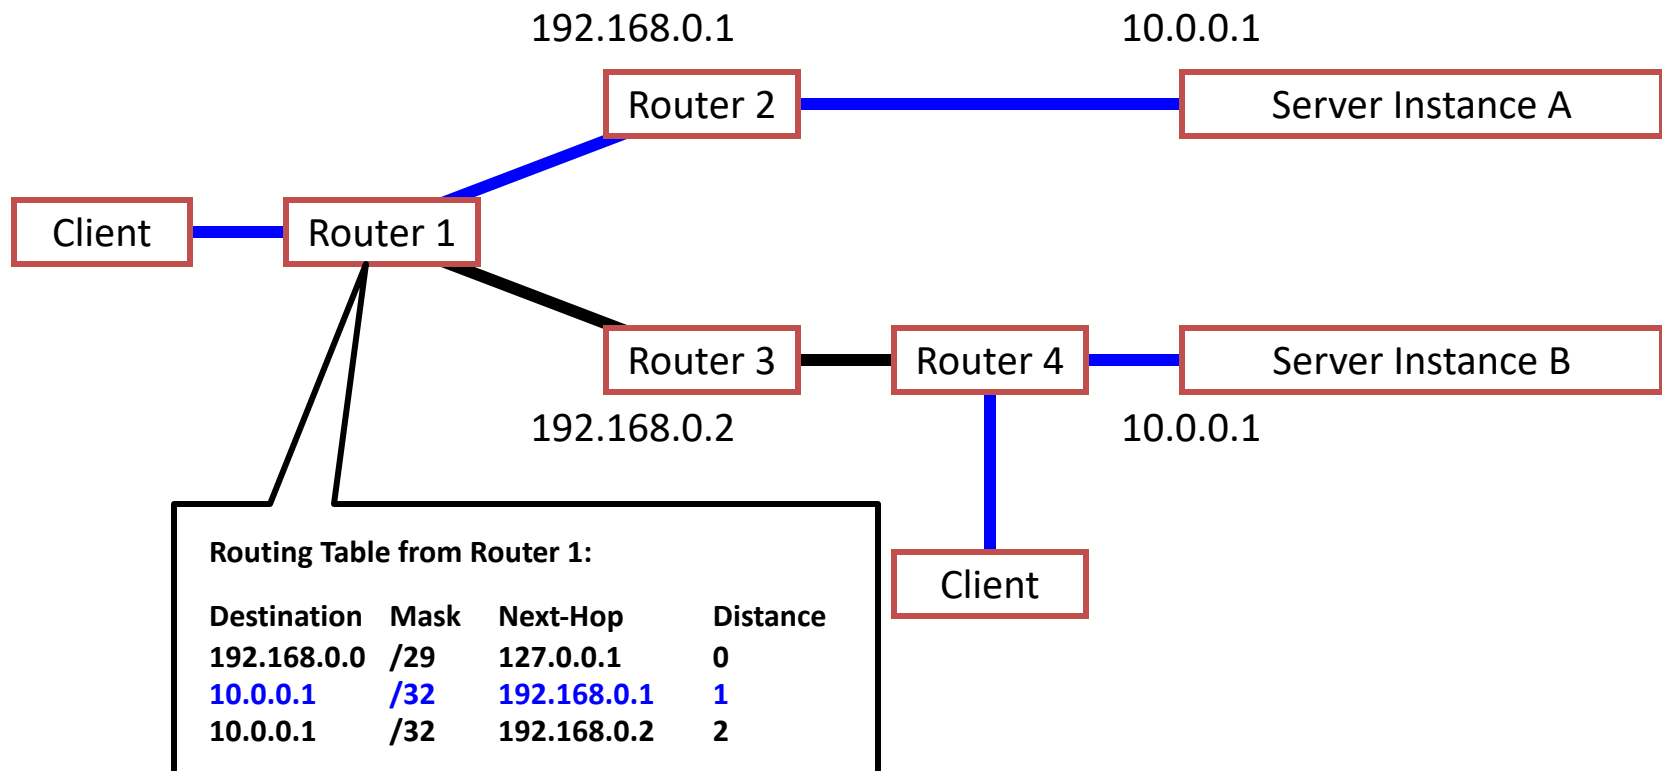


IP anycast in action

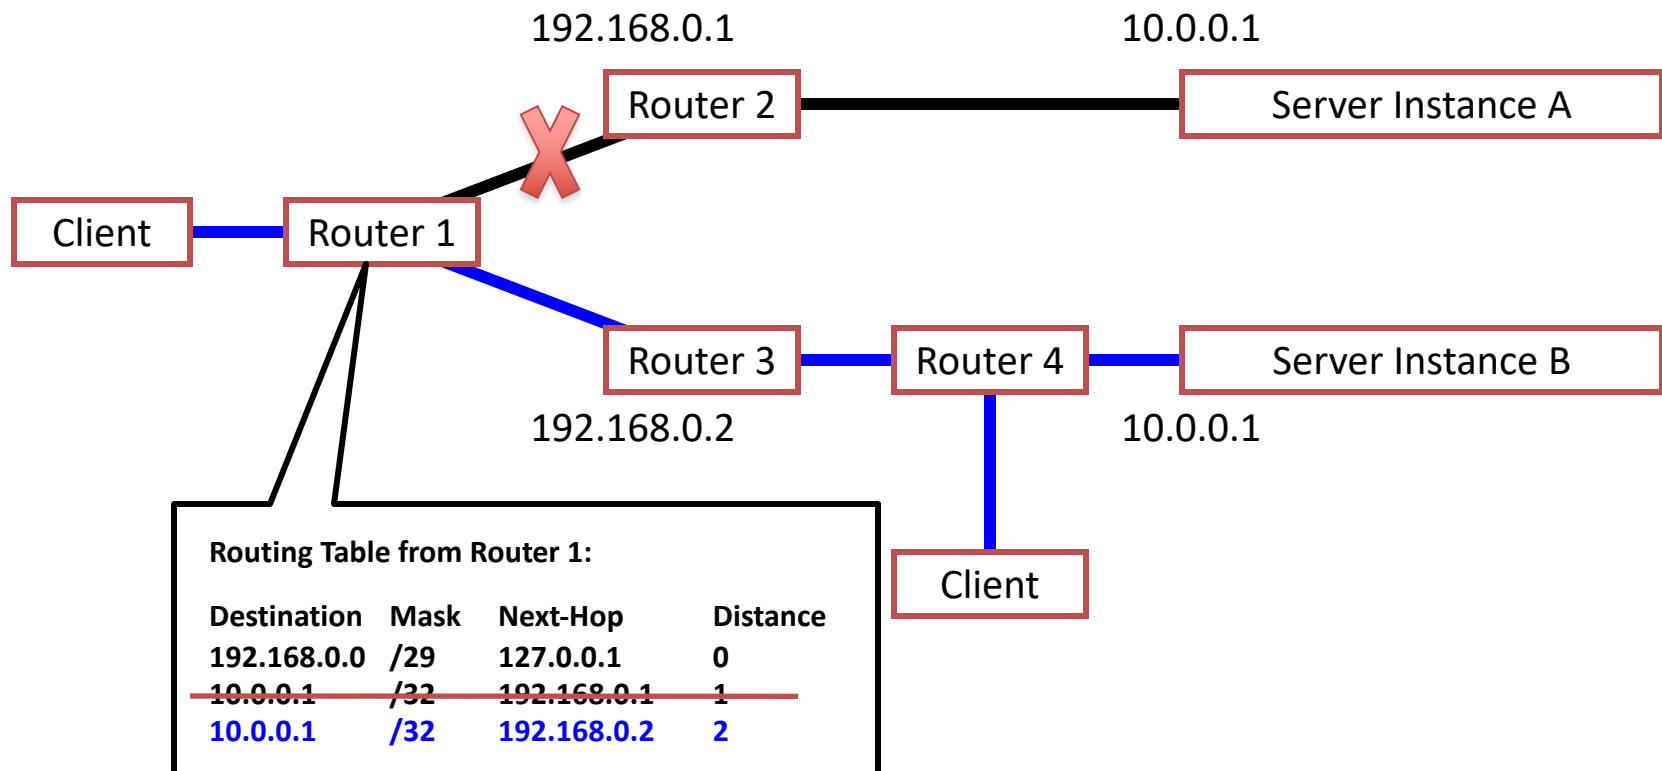

IP anycast in action

From client/router perspective, topology could as well be:

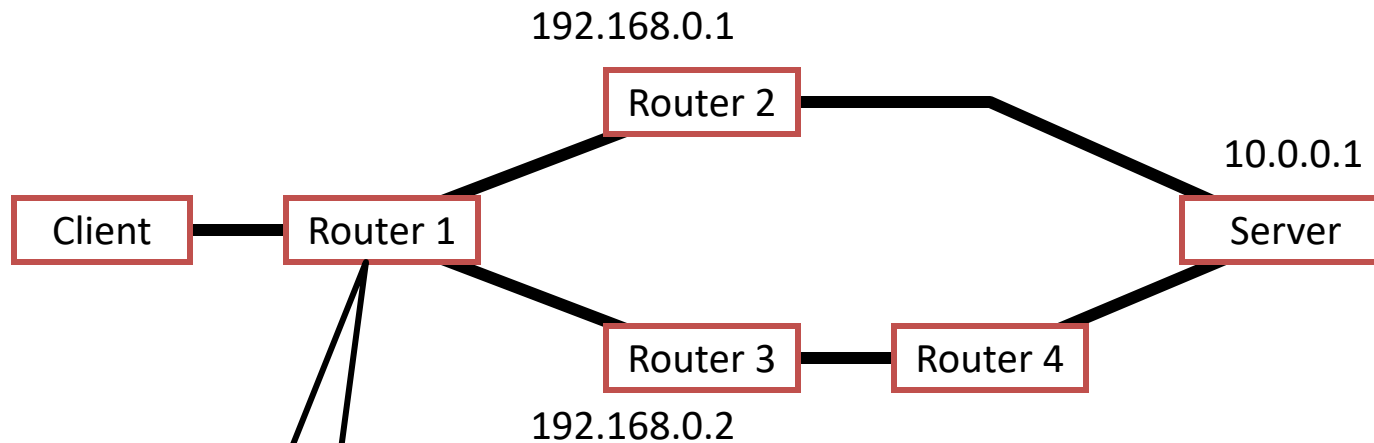

Routing Table from Router 1:

Destination	Mask	Next-Hop	Distance
192.168.0.0	/29	127.0.0.1	0
10.0.0.1	/32	192.168.0.1	1
10.0.0.1	/32	192.168.0.2	2

Downsides of IP anycast

- Many Tier-1 ISPs ingress filter prefixes $> /24$
 - Publish a $/24$ to get a “single” anycasted address:
Poor utilization
- Scales poorly with the # anycast groups
 - Each group needs entry in global routing table
- Not trivial to deploy
 - Obtain an IP prefix and AS number; speak BGP

Downsides of IP anycast


- **Subject to the limitations of IP routing**
 - No notion of load or other application-layer metrics
 - Convergence time can be slow (as BGP or IGP converge)
- **Failover doesn't really work with TCP**
 - TCP is stateful: if switch destination replicas, other server instances will just respond with RSTs
 - May react to network changes, even if server online
- **Root nameservers (UDP) anycasted, little else**

Multicast

Multicast


- **Many receivers**
 - Receiving the same content
- **Applications**
 - Video conferencing
 - Online gaming
 - IP television (IPTV)
 - Financial data feeds

multicast

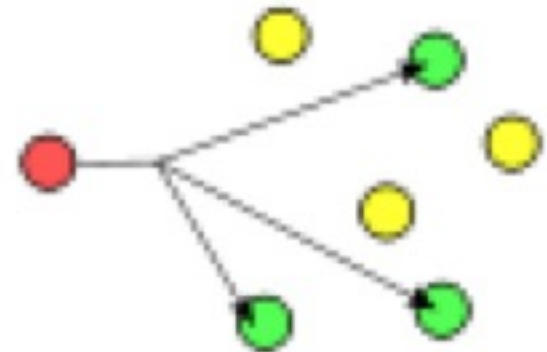

Iterated Unicast


- Unicast message to each recipient
- Advantages
 - Simple to implement
 - No modifications to network
- Disadvantages
 - High overhead on sender
 - Redundant packets on links
 - Sender must maintain list of receivers

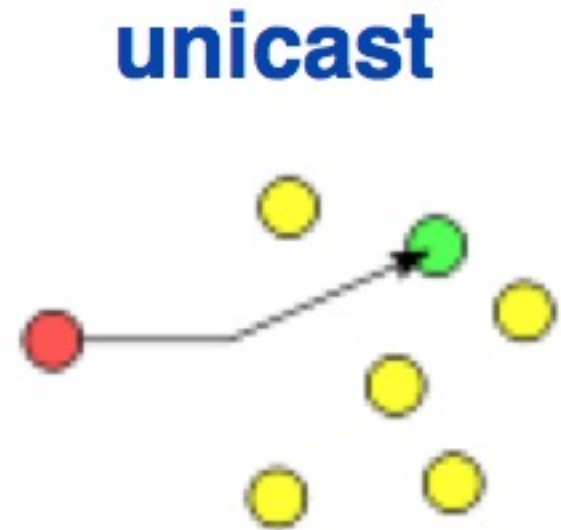


IP Multicast

- **Embed receiver-driven tree in network layer**
 - Sender sends a single packet to the group
 - Receivers “join” and “leave” the tree
- **Advantages**
 - Low overhead on the sender
 - Avoids redundant network traffic
- **Disadvantages**
 - Control-plane protocols for multicast groups
 - Overhead of duplicating packets in the routers


multicast

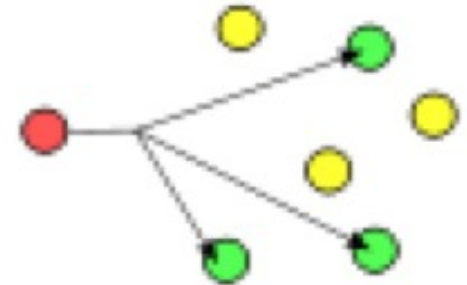

Multicast Tree

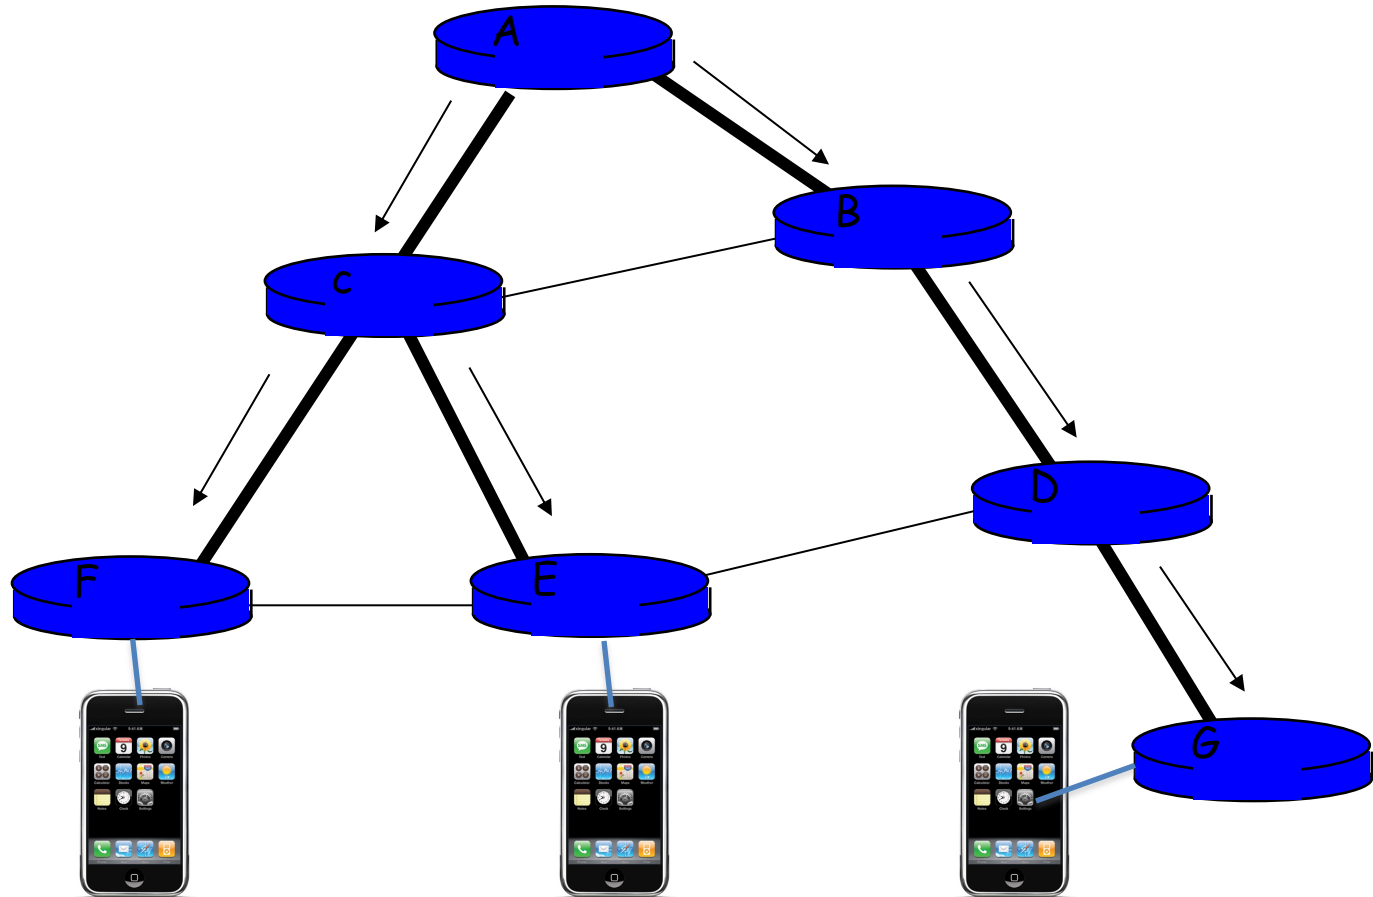

IP multicast in action

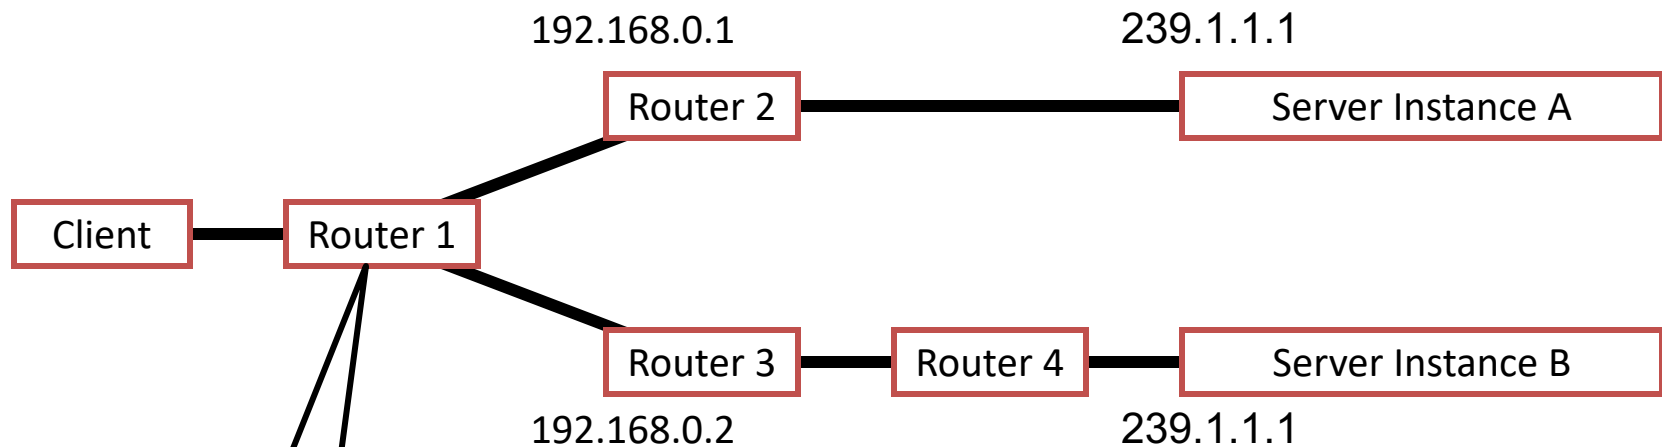

Routing Table from Router 1:

Destination	Mask	Next-Hop	Distance
192.168.0.0	/29	127.0.0.1	0
239.1.1.1	/32	192.168.0.1	1
239.1.1.1	/32	192.168.0.2	2

Single vs. Multiple Senders


- **Source-based tree**
 - Separate tree for each sender
 - Tree is optimized for that sender
 - But, requires multiple trees for multiple senders
- **Shared tree**
 - One common tree
 - Spanning tree that reaches all participants
 - Single tree may be inefficient
 - But, avoids having many different trees

Multicast Addresses

- Multicast “group” defined by IP address
 - Multicast addresses look like unicast addresses
 - 224.0.0.0 to 239.255.255.255
- Using multicast IP addresses
 - Sender sends to the IP address
 - Receivers join the group based on IP address
 - Network sends packets along the tree

Example Multicast Protocol

- Receiver sends a “join” messages to the sender
 - And grafts to the tree at the nearest point

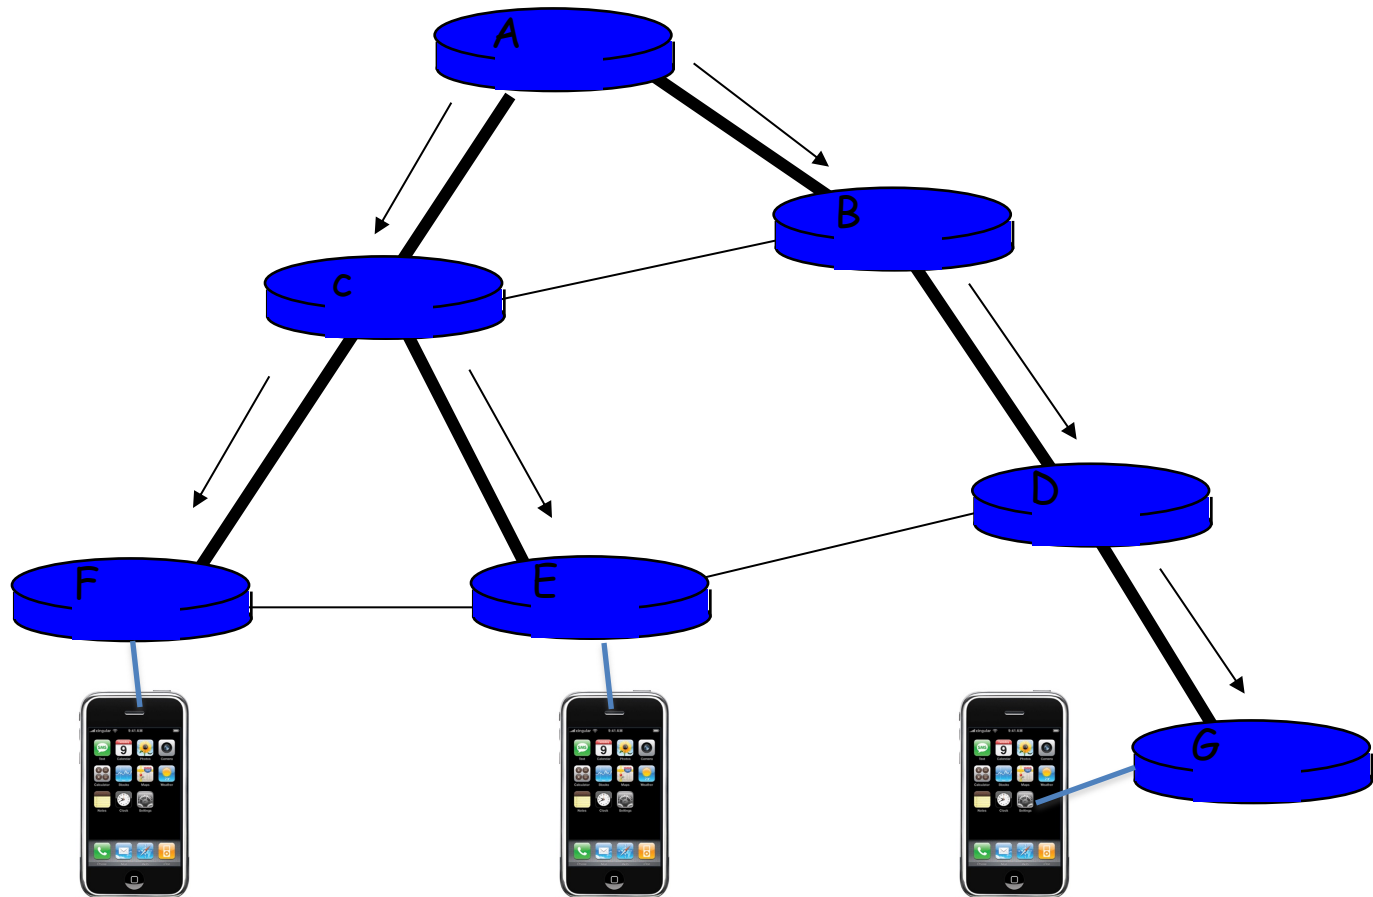

Internet Group Management Protocol (IGMP) v1

- Two types of IGMP messages:
 - **Host membership query:** Routers query local networks to discover which groups have members
 - **Host membership report:** Hosts report each group (e.g., multicast addr) to which belong, by broadcast on net interface from which query was received
- Routers maintain group membership
 - Host sends an IGMP “report” to join a group
 - Multicast routers periodically issue **host membership query** to determine liveness of group members
 - Note: No explicit “leave” message from clients

IGMP: Improvements


- IGMP v2 added:
 - If multiple routers, one with lowest IP elected querier
 - Explicit leave messages for faster pruning
 - Group-specific query messages
- IGMP v3 added:
 - **Source filtering:** Join specifies multicast “only from” or “all but from” specific source addresses

IGMP: Parameters and Design

- **Parameters**
 - Maximum report delay: 10 sec
 - Membership query interval default: 125 sec
 - Time-out interval: 270 sec = $2 * (\text{query interval} + \text{max delay})$
- **Router tracks each attached network, not each peer**
- **Should clients respond immediately to queries?**
 - **Random delay** (from 0..D) to minimize responses to queries
 - Only one response from single broadcast domain needed
- **What if local networks are layer-2 switched?**
 - L2 switches typically broadcast multicast traffic out all ports
 - Or, IGMP snooping (sneak peek into layer-3 contents), Cisco's proprietary protocols, or static forwarding tables

IP Multicast is Best Effort

- Sender sends packet to IP multicast address
 - Loss may affect multiple receivers

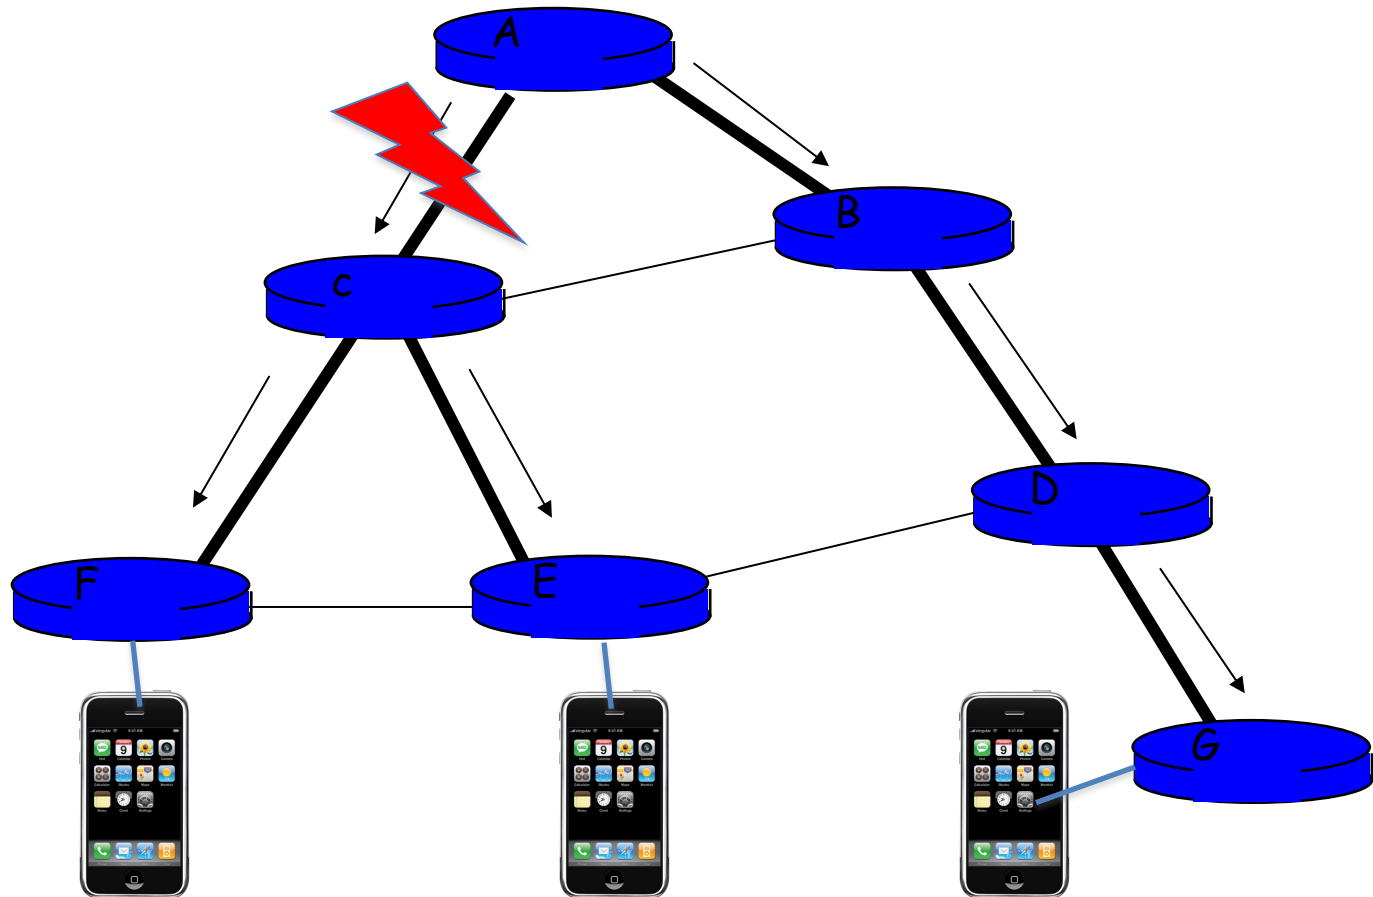

Challenges for Reliable Multicast

- Send an ACK, much like TCP?
 - ACK-implosion if all destinations ACK at once
 - Source does not know # of destinations
- How to retransmit?
 - To all? One bad link effects entire group
 - Only where losses? Loss near sender makes retransmission as inefficient as replicated unicast
- Negative acknowledgments more common

Scalable Reliable Multicast

- Data packets sent via IP multicast
 - Data includes sequence numbers
- Upon packet failure
 - If failures relatively rare, use Negative ACKs (NAKs) instead: “Did not receive expected packet”
 - Sender issues heartbeats if no real traffic. Receiver knows when to expect (and thus NAK)

Handling Failure in SRM

- Receiver multicasts a NAK
 - Or send NAK to sender, who multicasts confirmation
- Scale through NAK suppression
 - If received a NAK or NCF, don't NAK yourself
 - Add random delays before NAK'ing
- Repair through packet retransmission
 - From initial sender
 - From designated local repairer

Pragmatic General Multicast (RFC 3208)

- Similar approach as SRM: IP multicast + NAKs
 - ... but more techniques for scalability
- Hierarchy of PGM-aware network elements
 - NAK suppression: Similar to SRM
 - NAK elimination: Send at most one NAK upstream
 - Or completely handle with local repair!
 - Constrained forwarding: Repair data can be suppressed downstream if no NAK seen on that port
 - Forward-error correction: Reduce need to NAK

Outline today

- **IP Anycast**
 - N destinations, 1 should receive the message
 - Providing a service from multiple network locations
 - Using routing protocols for automated failover

- **Multicast protocols**
 - N destinations, N should receive the message
 - Examples
 - IP Multicast and IGMP
 - SRM (Scalable Reliable Multicast)
 - PGM (Pragmatic General Multicast)